


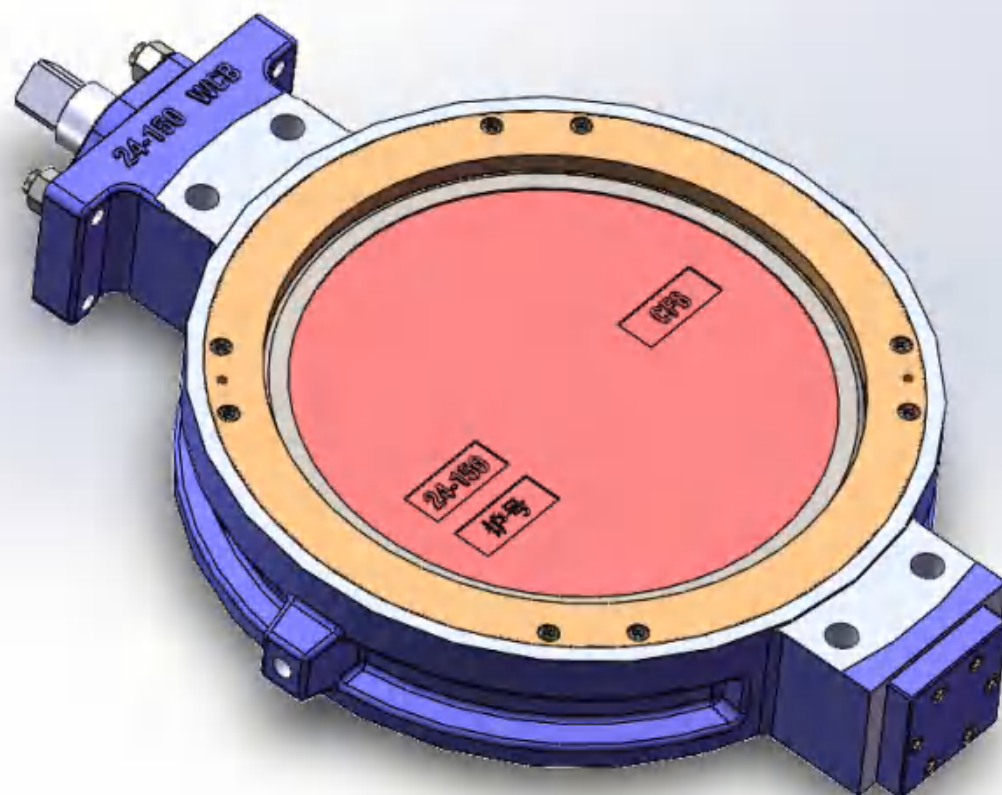

High Performance
BUTTERFLY VALVES

高性能蝶阀

无锡艾克顿流体科技有限公司

国内: 153 3520 5123 余经理
海外: 188 5271 7918 刘经理
Accion01@Accion.com
<https://www.wxaccion.com>
江苏省无锡市锡山区东升路292号





双偏心蝶阀

DOUBLE ECCENTRIC BUTTERFLY VALVE



强力试验机




卧式加工中心



化学分析室




卧式加工中心



数控镗铣加工中心



数控车床

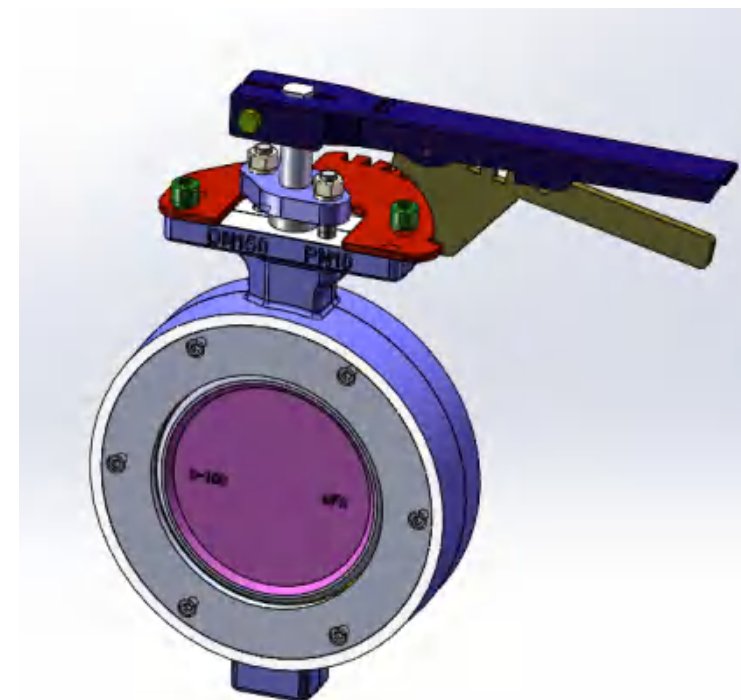

COMPANY PROFILE 企业简介

首先感谢各位在公司发展过程中给予的信任与支持。公司致力于阀门执行机构的研发与配套，目前主营产品:拨叉气动成套阀、AT/GT 气动成套阀、电液联动执行机构等。

公司以“科技创新”为立足之本，以“合作共赢”为经营理念。真诚的服务得到了客户的信任。客户的需求推动了我们技术进步、开拓创新的进程:广泛的交流，让我们在引进、吸纳、创新中衍生出新的智慧成果，科学的管理，增强了我们的专业服务能力;先进的机制，推动着公司稳定、持续而充满活力的发展。

因为专注所以专业，因为专业所以卓越，艾克顿流体科技将始终以“为客户创造价值”作为追求的目标期待与您再次合作。

CONTENTS 目录

Company profile
企业简介

Explanations to butterfly valve model establishment
蝶阀型号编制说明

Rated value
额定值

Flow parameters
流量参数

Butterfly valve Dimension
蝶阀尺寸



蝶阀型号编制说明

EXPLANATIONS TO BUTTERFLY VALVE MODEL ESTABLISHMENT



蝶阀型号编制说明

Explanations to butterfly valve model establishment

1	2	3	4	5	6	7	8	9

1: 阀门通径

DN15-DN1500

2: 阀门型态

8: 800系列高性能蝶阀

6: 600系列高性能球阀

3: 压力等级

06: 国标PN6

10: 国标PN10

15: 美标150LB

16: 国标PN16

25: 国标PN25

30: 美标300LB

40: 国标PN40

60: 美标600LB

64: 国标PN64

100: 国标PN100

4: 连接方式

W: 对夹式

L: 凸耳式

D: 法兰式

5: 启动方式

W: 光杆

Z: 光杆带支架连接轴

M: 手柄

G: 涡轮蜗杆

P: 气缸

D: 电动

6: 阀体材质代号

QT: 球墨铸铁

LB: 低温钢

22: WCB

34: CF8

34L: CF3

36: CF8M

36L: CF3M

4A: 2205

5A: 2507

HC: 哈氏合金C276

C9: C95800铝青铜

7: 碟板材质代号

34: CF8

34L: CF3

36: CF8M

36L: CF3M

4A: 2205

5A: 2507

HC: 哈氏合金C276

C9: C95800铝青铜

8: 阀杆材质代号

17: 17-4PH

36: F316

36L: F316L

XM: XM-19

4A: 2205

5A: 2507

K5: 蒙乃尔K500

HC: C276

9: 阀座材质代号

TT: 白色PTFE

RT: 增强RPTFE

PL: PPL

TF: TFM1600

PK: PEEK

JS: 金属阀座

TC: 陶瓷

FH: 防火阀座

概述

Summary

高性能蝶阀是本公司自行研制并引进欧洲先进技术转化产品。该蝶阀具有超独特的产品结构，超可靠的密封性能，超广阔的工况条件，超低小的操作扭矩，超长久的使用寿命，特殊工况安全防火，同类产品处于世界领先地位。

High performance butterfly valve is our company's own design product which apply European advanced technology. This butterfly valve has a unique structure with ultra reliable sealing performance, ultra wide working conditions, ultra low operating torque, ultra long service life, fire safe in special conditions. The high performance butterfly valve has a leading position compare to similar products around the world.

阀门尺寸有 Valve size includes

Class 150 对夹式 (Wafer)	1.5" ~ 60"	DN40 ~ DN1500
Class 150 凸耳式 (LUG)	2" ~ 60"	DN50 ~ DN1500
Class 150 法兰式 (Double Flange)	3" ~ 60"	DN80 ~ DN1500
Class 300 对夹式 (Wafer)	2" ~ 24"	DN50 ~ DN600
Class 300 凸耳式 (LUG)	2.5" ~ 24"	DN65 ~ DN600
Class 300 法兰式 (Double Flange)	3" ~ 24"	DN80 ~ DN600

该系列高性能对夹式蝶阀使用多种结构材料，包括符合NACE要求和抗磨蚀的。并可提供用于氯气、氧气、高真空和腐蚀生介质及低温环境的特殊阀门。

The series of high performance wafer type butterfly valves uses various structure materials, including those that meet NACE requirements and anticorrosive materials. Special valves that can be used in chlorine, oxygen, high vacuum, corrosive media and cryogenic condition are also available.

特点 Features

- 使用独特的动载密封PTFE阀座设计，弹性好，可靠性高；
- 无须增加O形圈或金属部件来保持密封；
- 唇缘式密封结构可补偿温度和压力的变化；
- 使用寿命长，维修量小；
- 密封试验，双向达到无气泡泄漏。
- The unique dynamic load seal PTFE seat design is adopted with good elasticity and high reliability.
- Sealing can be maintained without the need of adding O ring or metal part.
- The lip type sealing structure can compensate for the changes of temperature and pressure.
- Long service life and low maintenance.
- In seal test, there is no bubble and leakage at both directions.

偏置轴和偏心蝶板设计

Design of offset shaft and eccentric butterfly plate

- 在开启和处于中间位置时阀座与蝶板不发生接触；
- 在阀座上下部位无磨损点；
- 扭矩低，操作机构要求小。
- The seat and butterfly plate do not contact each other when the valve is opened or at the middle position.
- There is no wear point at the upper and lower parts of the seat.
- Low torque with low requirement for operating mechanism.



耐火结构 Fire resistant structure

耐火型阀门按API 607经过火烧试验。

The fire resistant type valve is subjected to fire test according to API 607.

阀座类型 Seat type

PTFE、R-PTFE、防火阀座等。
PTFE, R-PTFE, Fireproof seat, etc.

轴的固定可靠 Reliable fixing of shaft

轴的顶端有防吹出结构，在轴意外断裂时防止轴的上部移窜出压盖。

The anti-blow-out structure is provided at the top of the shaft to prevent the shaft from running out of the gland in case of accidental breaking of the shaft.

阀座维修保养方便 Convenient seat maintenance and servicing

只要取下嵌件即可更换阀座，不必拆卸蝶阀和轴。

The seat can be replaced just through removing the inserts without the need of disassembling the butterfly valve and shaft.

断流和控制兼备 Provided with shut-off and control functions

- 具有优良的控特性；
- 流量特性曲线等比变化；
- 调节范围广；
- 即使用于控制仍能紧密密封。
- Having excellent control characteristics
- Proportional change of flow characteristic curve
- Wide adjusting range
- Tight sealing can be realized even when it is used for control.



额定值

RATED VALUE


额定值
Rated value

阀座额定值


曲线上表示的阀座额定值只对阀座而言，是基于阀门全闭是蝶阀两端的压差。这些额定值可作为通用条件下使用指南。依据以往经验，经过改进和变换其他阀座材料，使用的额定值可更高。

Seat rated value

The seat rated values indicated on the curve are only for the seat. It is the differential pressure between the two ends of the butterfly valve when the valve is fully closed. These rated values can serve as use guide under general conditions. According to past experience, the rated values for improved and changed other seat materials may be higher.

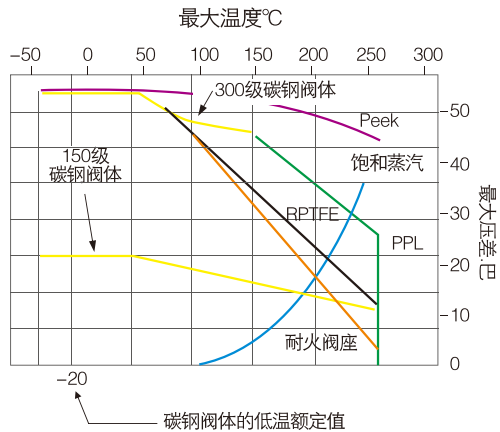

阀体连接形式
Body Type

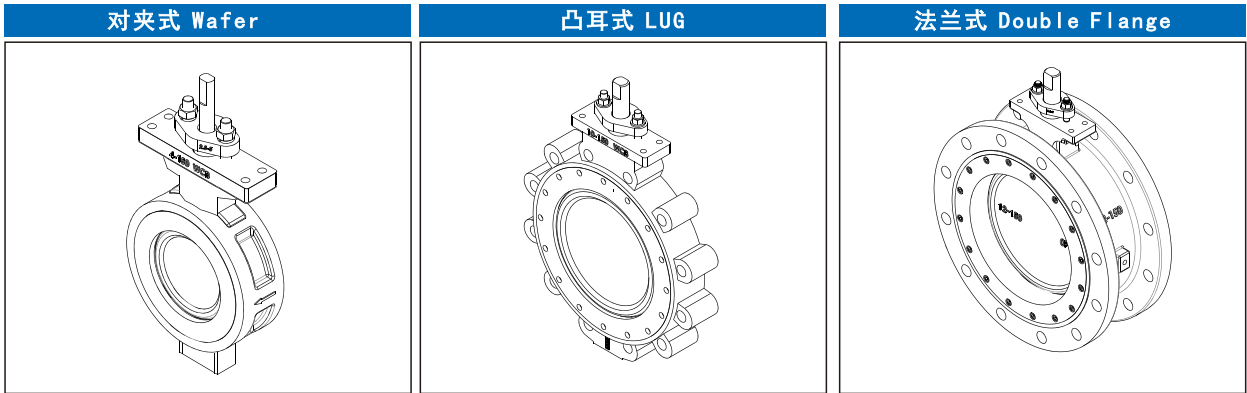

阀门扭矩
Valve torque

阀门尺寸 Valve size		150磅级扭矩，轴处于下游，标准阀座					
		关闭压差 Closing differential pressure					
英寸 Inch	DN	lb-ft@ 100psi	N.m@ 6.9bar	lb-ft@ 200psi	N.m@ 13.8bar	lb-ft@ 285psi	N.m@ 19.7bar
2	50	19	26	20	28	21	29
2-1/2	65	21	29	23	31	24	33
3	80	25	34	27	37	29	39
4	100	35	47	39	53	43	58
5	125	48	65	56	76	63	86
6	150	72	97	83	113	93	126
8	200	121	164	142	193	160	217
10	250	163	222	202	274	234	318
12	300	214	290	287	390	350	475
14	350	362	491	505	684	626	849
16	400	463	628	646	876	802	1087
18	450	602	816	844	1144	1050	1423
20	500	810	1098	1140	1546	1421	1926
24	600	1234	1673	1758	2384	2200	2983
30	750	2170	2942	2940	3986	3595	4873
36	900	3530	4786	4860	6589	5990	8121
42	1050	5780	7837	8060	10928	10000	13558
48	1200	9170	12433	12840	17409	15960	21638
54	1350	12950	17558	17900	24269	22110	29977
60	1500	19020	25790	26040	35310	32000	43397

阀门尺寸 Valve size		150磅级扭矩，轴处于下游，防火阀座					
		关闭压差 Closing differential pressure					
英寸 Inch	DN	lb-ft@ 100psi	N.m@ 6.9bar	lb-ft@ 200psi	N.m@ 13.8bar	lb-ft@ 285psi	N.m@ 19.7bar
2	50	28	39	30	42	32	45
2-1/2	65	42	57	45	61	47	64
3	80	53	72	57	77	59	81
4	100	67	91	74	100	80	108
5	125	97	132	114	155	128	174
6	150	131	178	152	206	170	230
8	200	218	296	256	347	288	391
10	250	333	452	406	550	468	635
12	300	508	589	636	862	745	1010
14	350	604	819	758	1028	889	1205
16	400	710	963	920	1247	1099	1489
18	450	970	1315	1370	1857	1710	2318
20	500	1390	1885	1980	2685	2482	3364
24	600	2050	2779	2700	3661	2200	2983
30	750	2920	3959	3940	5342	4807	6517
36	900	3530	4786	4960	6725	5990	8121
42	1050	5620	7620	7440	10087	10000	13558
48	1200	8800	11931	12100	16405	14905	20208

阀门尺寸 Valve size		300磅级扭矩，轴处于下游，标准阀座											
		关闭压差 Closing differential pressure											
英寸 Inch	DN	lb-ft@ 300psi	N.m@ 20.7bar	lb-ft@ 400psi	N.m@ 27.6bar	lb-ft@ 500psi	N.m@ 34.5bar	lb-ft@ 600psi	N.m@ 41.4bar	lb-ft@ 700psi	N.m@ 48.3bar	lb-ft@ 740psi	N.m@ 51bar
2 1/2	65	30	41	33	45	36	50	39	54	42	58	44	60
3	80	31	42	34	46	38	51	41	55	44	60	45	62
4	100	52	70	58	79	65	88	72	97	78	106	81	110
6	150	119	161	138	188	158	214	178	241	197	267	205	278
8	200	231	313	271	368	312	422	352	477	392	532	408	554
10	250	354	480	422	572	490	664	557	756	625	848	652	885
12	300	492	667	582	790	673	913	764	1035	854	1158	890	1207
14	350	824	1117	1012	1372	1200	1627	1388	1882	1576	2137	1651	2239
16	400	989	1340	1212	1643	1435	1946	1658	2248	1881	2550	1970	2671
18	450	1279	1734	1562	2118	1845	2520	2128	2885	2411	3269	2524	3422
20	500	1707	2314	2096	2842	2485	3369	2874	3897	3263	4424	3419	4635
24	600	2309	3131	2832	3840	3355	4549	3878	5258	4401	5967	4610	6251
30	750	4210	5708	5080	6888	5950	8067	6820	9247	7690	10426	8038	10898
36	900	7220	9789	8760	11877	10300	13965	11840	16053	13380	18141	13996	18976

阀门尺寸 Valve size		300磅级扭矩，轴处于下游， 防火阀座											
		关闭压差 Closing differential pressure											
英寸 Inch	DN	lb-ft@ 300psi	N.m@ 20.7bar	lb-ft@ 400psi	N.m@ 27.6bar	lb-ft@ 500psi	N.m@ 34.5bar	lb-ft@ 600psi	N.m@ 41.4bar	lb-ft@ 700psi	N.m@ 48.3bar	lb-ft@ 740psi	N.m@ 51bar
2 1/2	65	45	62	50	68	54	75	59	81	63	87	66	90
3	80	57	77	58	79	60	81	61	83	63	85	63	86
4	100	86	117	94	127	102	138	110	149	118	160	121	164
6	150	189	256	212	287	235	319	258	350	281	381	290	394
8	200	313	424	354	480	395	536	436	591	477	647	493	669
10	250	464	629	522	708	580	786	638	865	696	944	719	975
12	300	825	1119	960	1302	1095	1485	1230	1668	1365	1851	1419	1924
14	350	922	1250	1076	1459	1230	1668	1384	1877	1538	2085	1600	2169
16	400	1170	1586	1396	1885	1610	2183	1830	2481	2050	2779	2138	2899
18	450	1980	2685	2440	3308	2900	3932	3360	4556	3820	5179	4004	5429
20	500	2800	3796	3460	4691	4120	5586	4780	6481	5400	7376	5704	7734
24	600	4400	5966	5400	7321	6400	8677	7400	10033	8400	11389	8800	11931



流量参数

FLOW PARAMETERS




流量参数
Flow parameters

下表提供了150磅级和300磅级蝶阀的流量系数。Cv值表示压差为1磅/英寸²（0.07巴），温度为60° F（15.6°C）时每分钟流过全开启阀门的水流量，单位为美国加仑/分钟。

150磅级 Class		
阀门尺寸 Valve size		Cv
英寸 Inch	DN	
2	50	57
2-1/2	65	78
3	80	165
4	100	400
5	125	650
6	150	1,050
8	200	2,200
10	250	3,300
12	300	5,100
14	350	5,800
16	400	8,000
18	450	10,500
20	500	14,000
24	600	21,600
30	750	34,000
36	900	55,500
42	1050	82,650
48	1200	108,300
54	1350	133,500
60	1500	159,000

300磅级 Class		
阀门尺寸 Valve size		Cv
英寸 Inch	DN	
2 1/2	65	78
3	80	165
4	100	400
6	150	1,050
8	200	1,800
10	250	3,150
12	300	4,750
14	350	5,200
16	400	6,900
18	450	9,300
20	500	11,300
24	600	18,500
30	750	29,100
36	900	47,500

The flow coefficient of 150lb and 300lb butterfly valves is listed in the following table. Cv value indicates water flow per minute that passes through the fully opened valve when the differential pressure is 1psi (0.07bar) and the temperature is 60° F (15.6°C), and its unit is USgal/min.

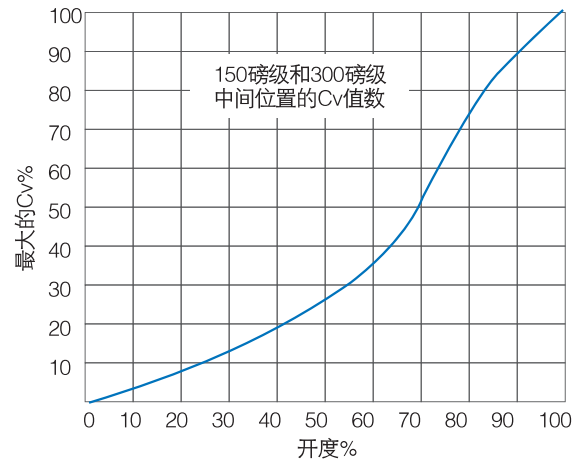

为确定中间位置阀门的Cv值：
To confirm Cv value of the valve at the middle position:


- 1.从曲线表中确定最大Cv值的百分率
- 2.将曲线表中的最大Cv值的百分率乘以流量数据表中的Cv值

1. Confirm the percentage of the maximum Cv value from the curve
2. Multiply the percentage of the maximum Cv value from the curve by the Cv value from the flow datasheet

例如：6"(DN150)150级蝶阀70%开度时的Cv值为：
（1）从曲线表中确定6"（DN150）150级蝶阀70%开度时的最大Cv值的百分率为53%
（2）53%的最大Cv值为，Cv值=0.53 × 1050=560

For example: The Cv value of the butterfly valve of 6"(DN150), 150lb under opening of 70% is:
(1) Confirm the percentage of the maximum Cv value of the butterfly valve of 6"(DN150), 150lb under opening of 70% is 53%.
(2) The maximum Cv value is: Cv value=0.53 × 1050=560

零件材料明细表
Table of materials for spare parts

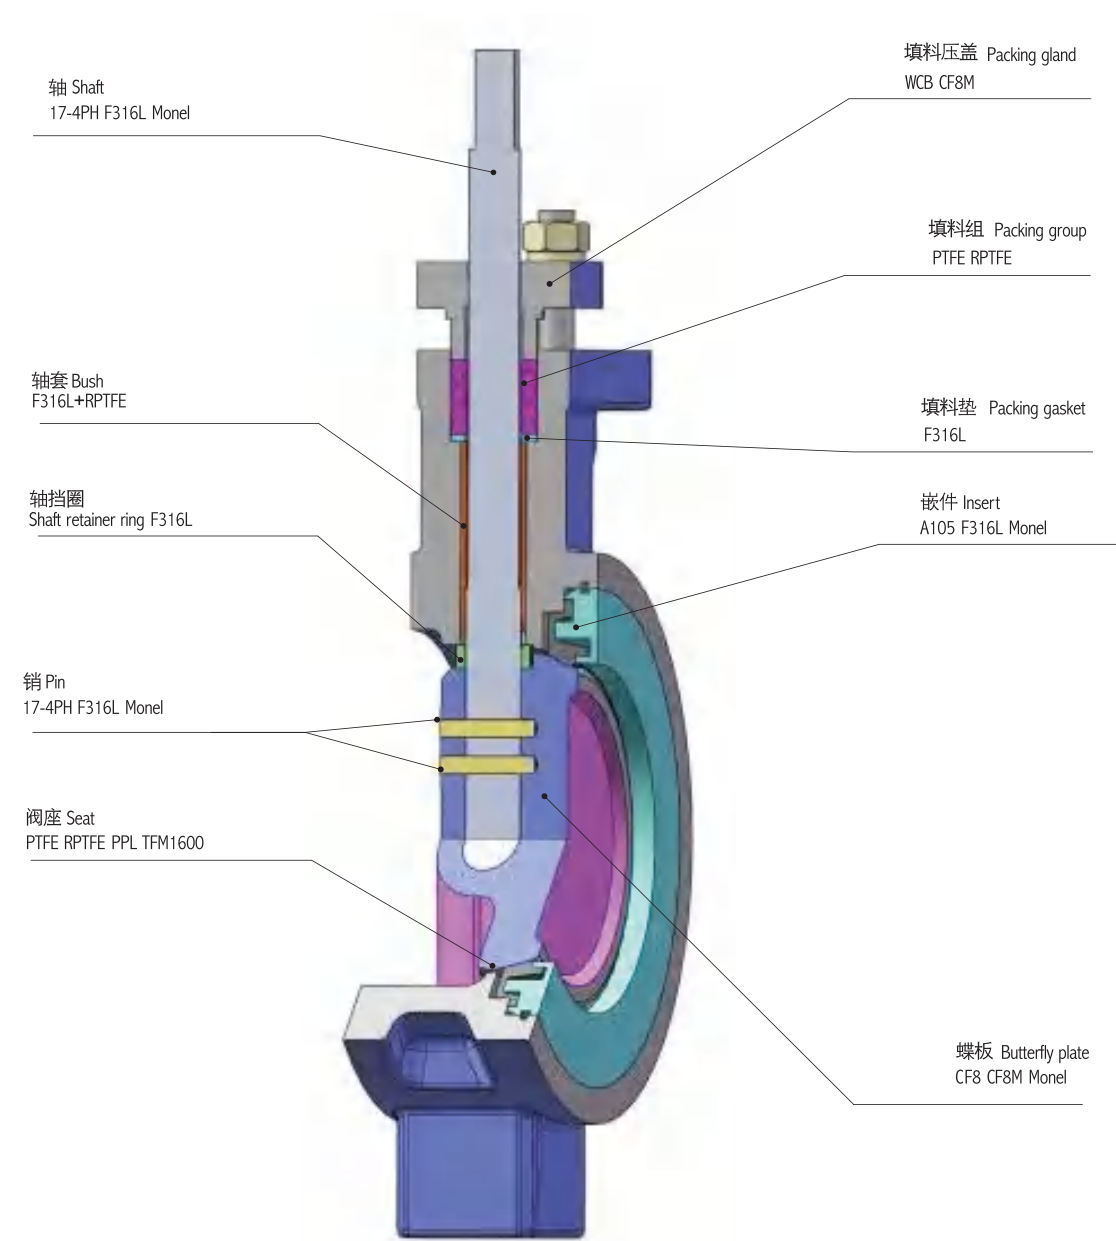




对夹式蝶阀

WAFER TYPE BUTTERFLY VALVE



150磅级对夹式蝶阀尺寸
Class 150 Wafer Type Butterfly valve Dimension

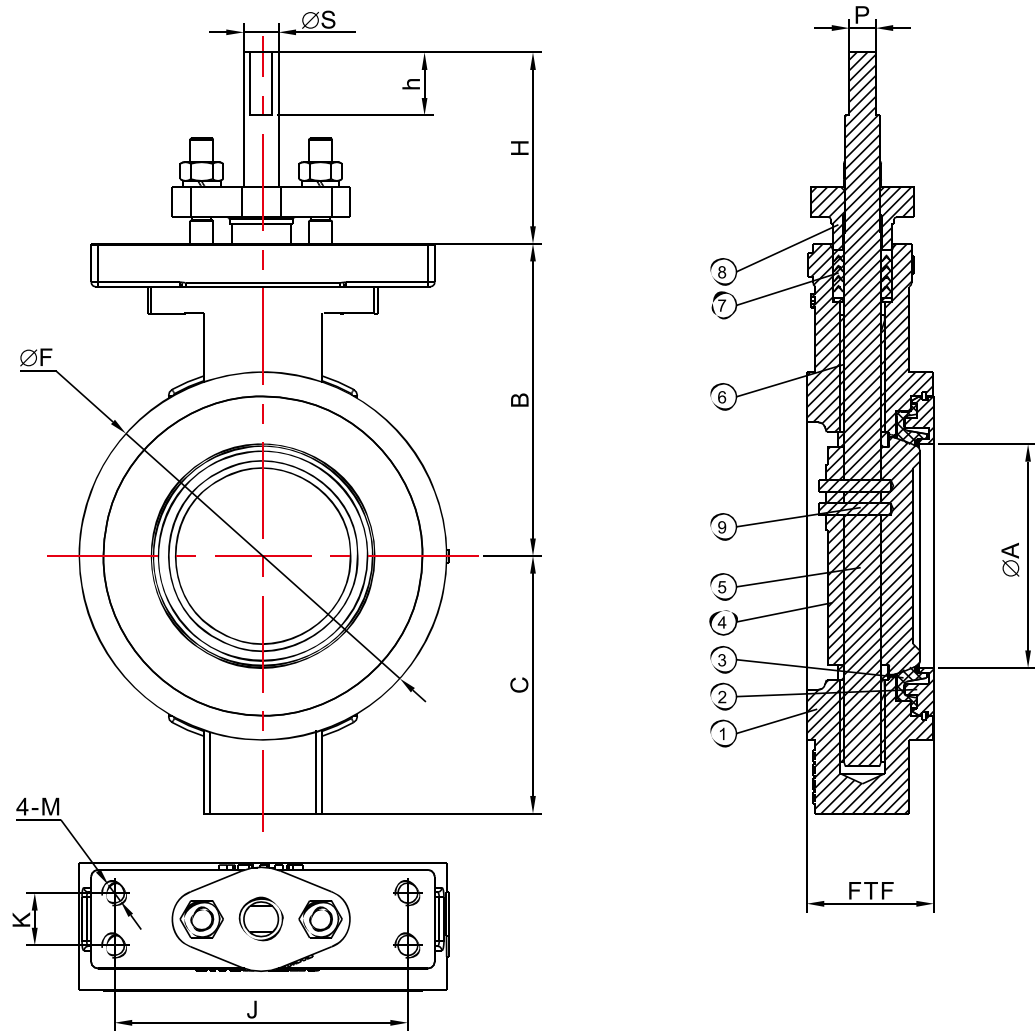


NPS	$\varnothing A$	B	C	$\varnothing F$	FTF ± 3.3	H	h	P	$\varnothing S$	J	K	M
1 1/2"	38	82	70	102	44	42.5	14	7	10	125.4	22.4	M10
2"	50	82	70	102	44	42.5	14	7	10	125.4	22.4	M10
2.5"	59	111	82	118	48	82	27	11.2	14.8	125.4	22.4	M10
3"	73	120	93	132	48	82	27	11.2	14.8	125.4	22.4	M10
4"	96	133	110	157	54	82	27	11.2	14.8	125.4	22.4	M10
5"	111	135	120	186	57	82	27	11.2	14.8	125.4	22.4	M10
6"	142	152	135	217	57	82	27	14	18	125.4	22.4	M10
8"	188	187	172	273	64	82	27	15.9	21.9	125.4	22.4	M10
10"	236	231	202	330	71	97	28	20.6	28	142.7	37.3	M12
12"	282	260	241	376	81	97	33	23.8	33.3	142.7	37.3	M12
14"	314	315	295	413	92	105	41	28.7	37	142.7	37.3	M16

请在需要的材料配置方框里打勾，需要其它材料的请在空白列
Place a tick in the appropriate box which material you required.
Other materials tick the "other" column and remark.

No	Partname	☐ A	☐ B	☐ C	☐ D	☐ E	☐ Other
9	Pin	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH	
8	Cover	WCB	WCB	CF8	CF8M	CF3M	
7	Packing	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE	
6	Sleeve	316L+RPTFE					
5	Stem	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH	
4	Disc	CF8	CF8M	CF8	CF8M	CF3M	
3	Seat	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE	
2	Insert	A105	A105	F304	F316	F316L	
1	Body	WCB	WCB	CF8	CF8M	CF3M	

Data			Technology standard		
Pressure	Class 150		Design & manufacturing standards	API609	
Type	Wafer		Temperature & pressure standards	ASME B16.34	
Temperature	-30°C~180°C		Inspection & test	API598	
Leakage	VI FC170-2		Flange size	ASME B16.5	

150磅级对夹式蝶阀尺寸
Class 150 Wafer Type Butterfly valve Dimension

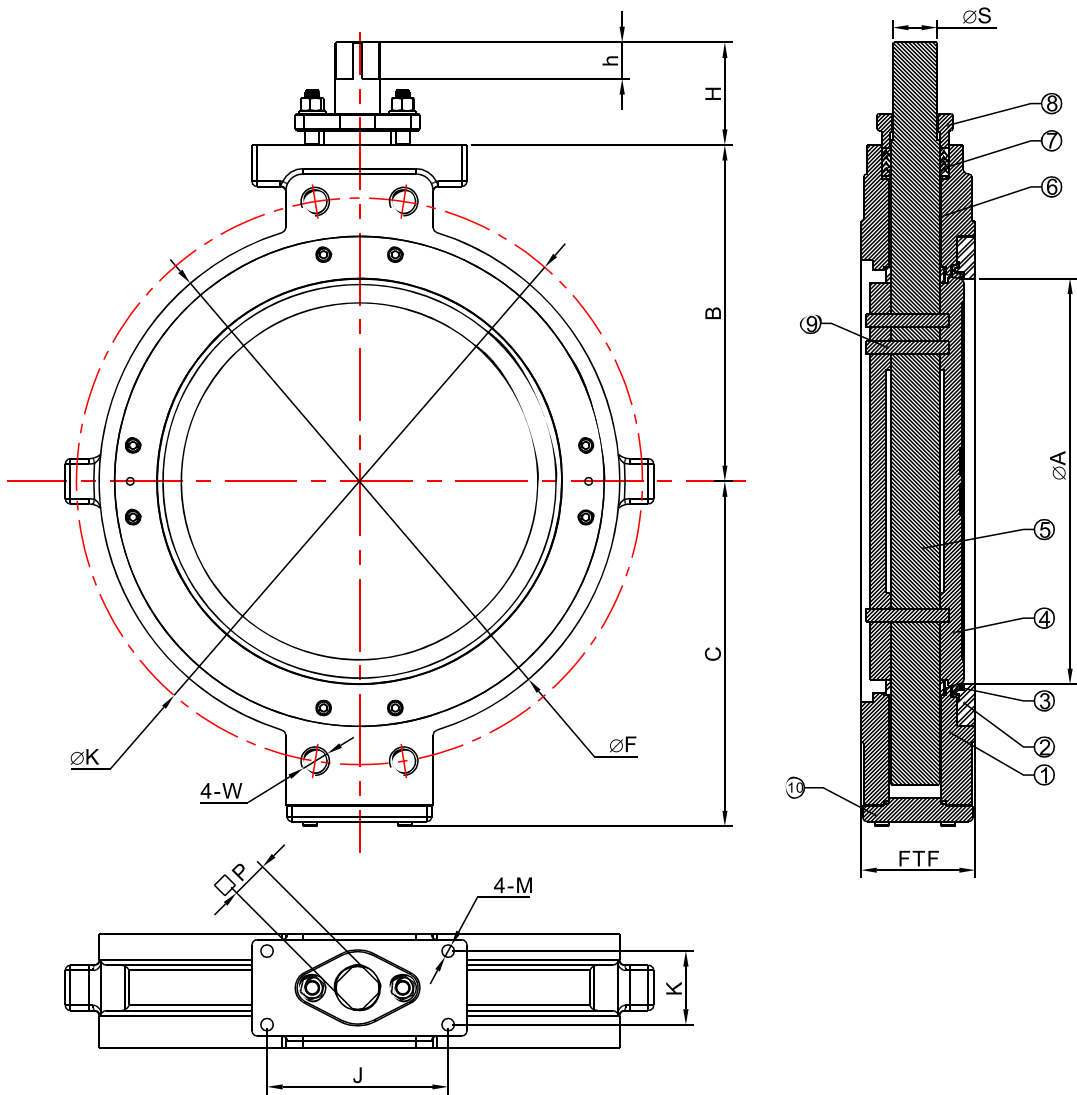

NPS	$\varnothing A$	B	C	$\varnothing F$	FTF ± 3.3	H	h	P	$\varnothing S$	J	K	M	$\varnothing K$	W
16"	362	355	329	470	102	111	41	33.5	42	203.2	82.6	M16	539.8	$\varnothing 30$
18"	413	356	340	533	114	111	41	35	47	203.2	82.6	M16	577.9	1 1/8"-8UN
20"	455	377	387	584	127	115	41	41.4	50	203.2	82.6	M16	635	1 1/8"-8UN
24"	548	490	467	692	154	130	51	51	64	254	107.7	M20	749.3	1 1/4"-8UN
28"	682	570	552	799	165	157	50.8	50.8	66	254	107.7	M20	863.6	1 1/4"-8UN
30"	702	570	557	863	167	157	50.8	50.8	66	254	107.7	M20	914.4	1 1/4"-8UN
32"	702	570	557	905	191	157	50.8	50.8	66	254	107.7	M20	977.9	1 1/2"-8UN
48"	1168	841	805	1385	254	293	90	90	125	381	178	M20	1422.4	1 1/2"-8UN

请在需要的材料配置方框里打勾，需要其它材料的请在空白列
Place a tick in the appropriate box which material you required.
Other materials tick the "other" column and remark.

No	Partname	☐ A	☐ B	☐ C	☐ D	☐ E	☐ Other
9	Pin	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH	
8	Cover	WCB	WCB	CF8	CF8M	CF3M	
7	Packing	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE	
6	Sleeve	316L+RPTFE					
5	Stem	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH	
4	Disc	CF8	CF8M	CF8	CF8M	CF3M	
3	Seat	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE	
2	Insert	A105	A105	F304	F316	F316L	
1	Body	WCB	WCB	CF8	CF8M	CF3M	

Data			Technology standard		
Pressure	Class 150		Design & manufacturing standards	API609	
Type	Wafer		Temperature & pressure standards	ASME B16.34	
Temperature	-30°C~180°C		Inspection & test	API598	
Leakage	VI FC170-2		Flange size	ASME B16.5	




对夹式蝶阀

WAFER TYPE BUTTERFLY VALVE



300磅级对夹式蝶阀尺寸
Class 300 Wafer Type Butterfly valve Dimension

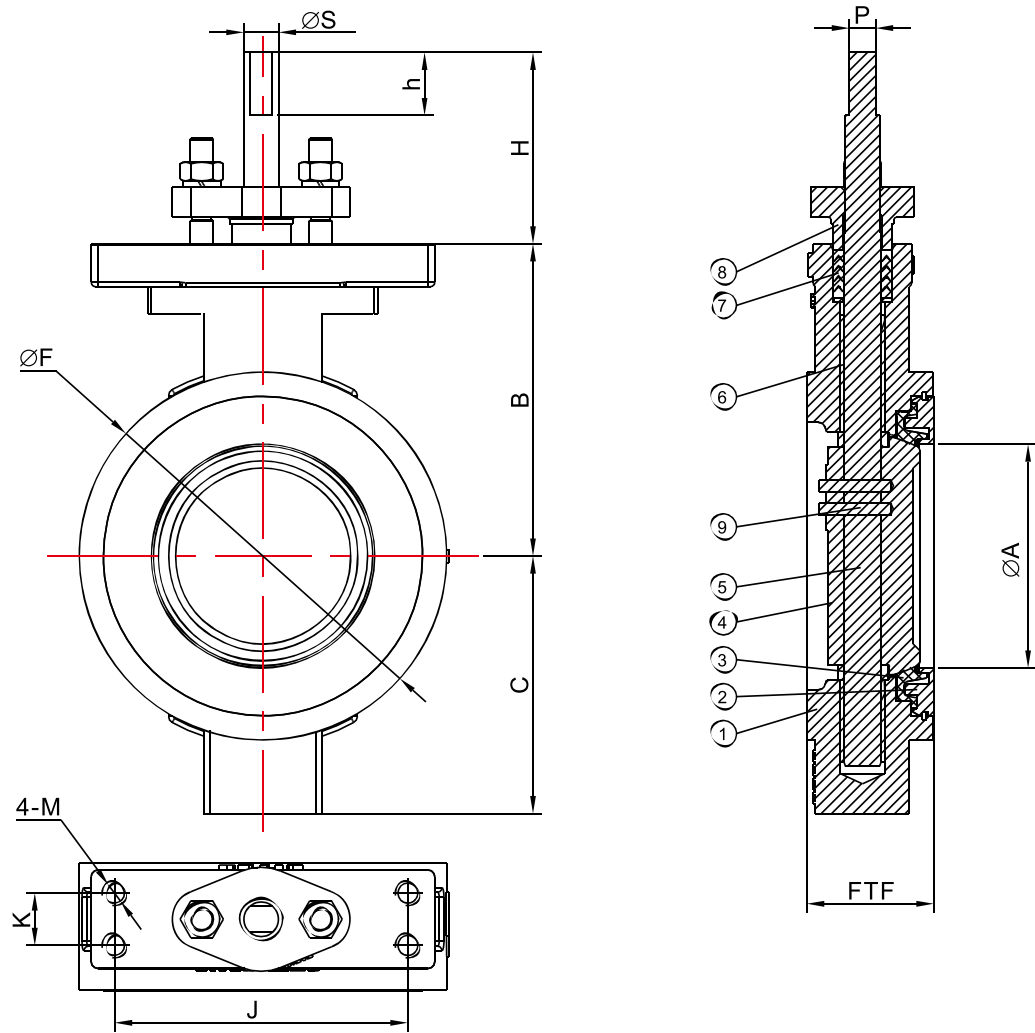


请在需要的材料配置方框里打勾，需要其它材料的请写在空白列

Place a tick in the appropriate box which material you required.
Other materials tick the "other" column and remark.

Place a tick in the appropriate box which material you required. Other materials tick the "other" column and remark.								NPS	øA	B	C	øF	FTF±3.3	H	h	P	øS	J	K	M	
No	Partname	☐ A	☐ B	☐ C	☐ D	☐ E	☐ Other	2"	38	81.8	70	102	44	42.5	14	7	10	125.4	22.4	M10	
9	Pin	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH		2.5"	59	111.1	82.5	118	48	82	27	11.2	14.8	125.4	22.4	M10	
8	Cover	WCB	WCB	CF8	CF8M	CF3M		3"	73	120.5	93	132	48	82	27	11.2	14.8	125.4	22.4	M10	
7	Packing	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE		4"	96	133.3	110	157	54	82	27	11.2	14.8	125.4	22.4	M10	
6	Sleeve	316L+RPTFE						5"	111	135	120	186	57	82	27	11.2	14.8	125.4	22.4	M10	
5	Stem	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH		6"	142	174	153	217	59	82	27	15.9	21.9	125.4	22.4	M10	
4	Disc	CF8	CF8M	CF8	CF8M	CF3M		8"	188	212	180	273	73	95	28	20.6	28	142.7	37.3	M12	
3	Seat	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE		Data					Technology standard								
2	Insert	A105	A105	F304	F316	F316L		Pressure		Class 300		Design & manufacturing standards								API609	
1	Body	WCB	WCB	CF8	CF8M	CF3M		Type		Wafer		Temperature & pressure standards						ASME B16.34			
								Temperature		-30℃~180℃		Inspection & test						API598			
								Leakage		vi FCI70-2		Flange size						ASME B16.5			

300磅级对夹式蝶阀尺寸
Class 300 Wafer Type Butterfly valve Dimension

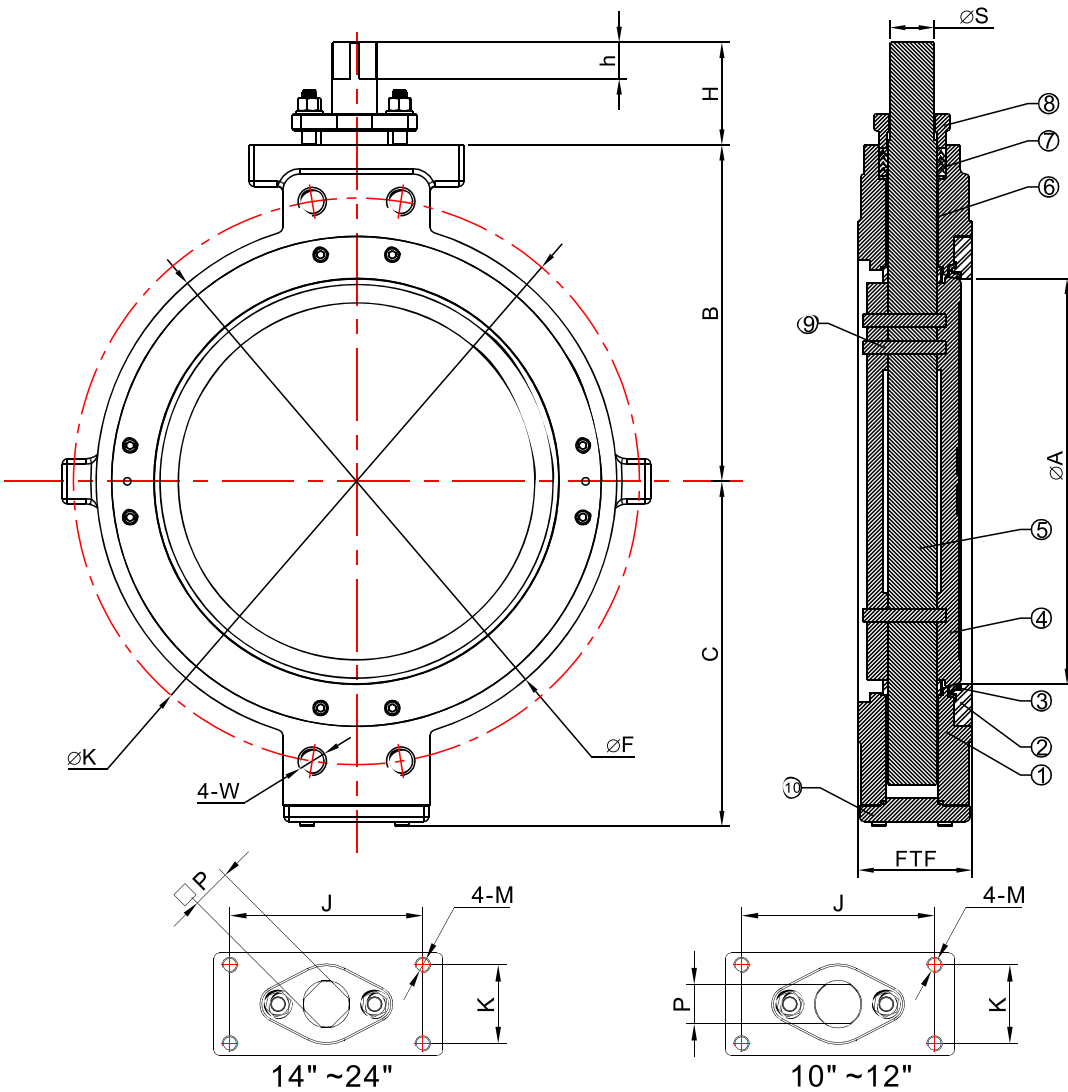

请在需要的材料配置方框里打勾，需要其它材料的请写在空白列

Place a tick in the appropriate box which material you required.
Other materials tick the "other" column and remark.

Place a tick in the appropriate box which material you required. Other materials tick the "Other" column and remark.								NPS	ØA	B	C	ØF	FTF±3.3	H	h	P	ØS	J	K	M	ØK	4-W
No	Partname	☐ A	☐ B	☐ C	☐ D	☐ E	☐ Other	10"	236	254	222	327	83	100	33	23.8	33.3	142.7	37.3	M12	387.4	1"-8UN
9	Pin	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH		12"	282	282	284	385	92	105	41	28.7	37	142.7	37.3	M12	450.8	1 1/8"-8UN
8	Cover	WCB	WCB	CF8	CF8M	CF3M		14"	314	325	310	416	117	102	34.5	41.4	50	203.2	82.6	M16	514.4	1 1/8"-8UN
7	Packing	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE		16"	362	350	338	472	133	102	34.5	41.4	50	203.2	82.6	M16	571.5	1 1/4"-8UN
6	Sleeve	316L+RPTFE						18"	413	424	412	537	149	118	40	51	64	254	107.7	M20	628.6	1 1/4"-8UN
								20"	454	446	440	588	159	130	43	51	64	254	107.7	M20	658.8	1 1/4"-8UN
								24"	548	500	505	692	181	145	60	51	64	254	107.7	M20	812.8	1 1/2"-8UN
5	Stem	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH		Data					Technology standard									
4	Disc	CF8	CF8M	CF8	CF8M	CF3M		Pressure		Class 300		Design & manufacturing standards					API609					
3	Seat	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE		Type		Wafer		Temperature & pressure standards					ASME B16.34					
2	Insert	A105	A105	F304	F316	F316L		Temperature		-30℃~180℃		Inspection & test					API598					
1	Body	WCB	WCB	CF8	CF8M	CF3M		Leakage		VI FC170-2		Flange size					ASME B16.5					



No	Partname	☐ A	☐ B	☐ C	☐ D	☐ E	☐ Other															
9	Pin	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH		NPS	øA	B	C	FTF ±3.3	H	h	□P	φS	J	K	M	φF	φK	N - W
8	Cover	WCB	WCB	CF8	CF8M	CF3M		14"	314	325	312	117	102	34.5	41.4	50	203.2	82.6	M16	584	514.4	20 - 1 1/8"-8UN
7	Packing	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE		16"	363	350	341	133	102	34.5	41.4	50	203.2	82.6	M16	647	571.5	20 - 1 1/4"-8UN
6	Sleeve	316L+RPTFE						18"	413	424	418	149	118	40	51	64	254	107.7	M20	711	628.6	24 - 1 1/4"-8UN
		20"	455	446	441	159	130	43	51	64	254	107.7	M20	774	685.8	24 - 1 1/4"-8UN						
		24"	549	500	507	181	145	60	51	64	254	107.7	M20	914	812.8	24 - 1 1/2"-8UN						
5	Stem	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH		Data						Technology standard								
4	Disc	CF8	CF8M	CF8	CF8M	CF3M		Pressure	Class 300				Design & manufacturing standards						API609			
3	Seat	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE		Type	LUG				Temperature & pressure standards						ASME B16.34			
2	Insert	A105	A105	F304	F316	F316L		Temperature	-30℃~180℃				Inspection & test						API598			
1	Body	WCB	WCB	CF8	CF8M	CF3M		Leakage	v1 FCI70-2				Flange size						ASME B16.5			




对夹式蝶阀

WAFER TYPE BUTTERFLY VALVE



PN16双法兰式蝶阀尺寸 PN16 Double Flange Type Butterfly Valve Dimension

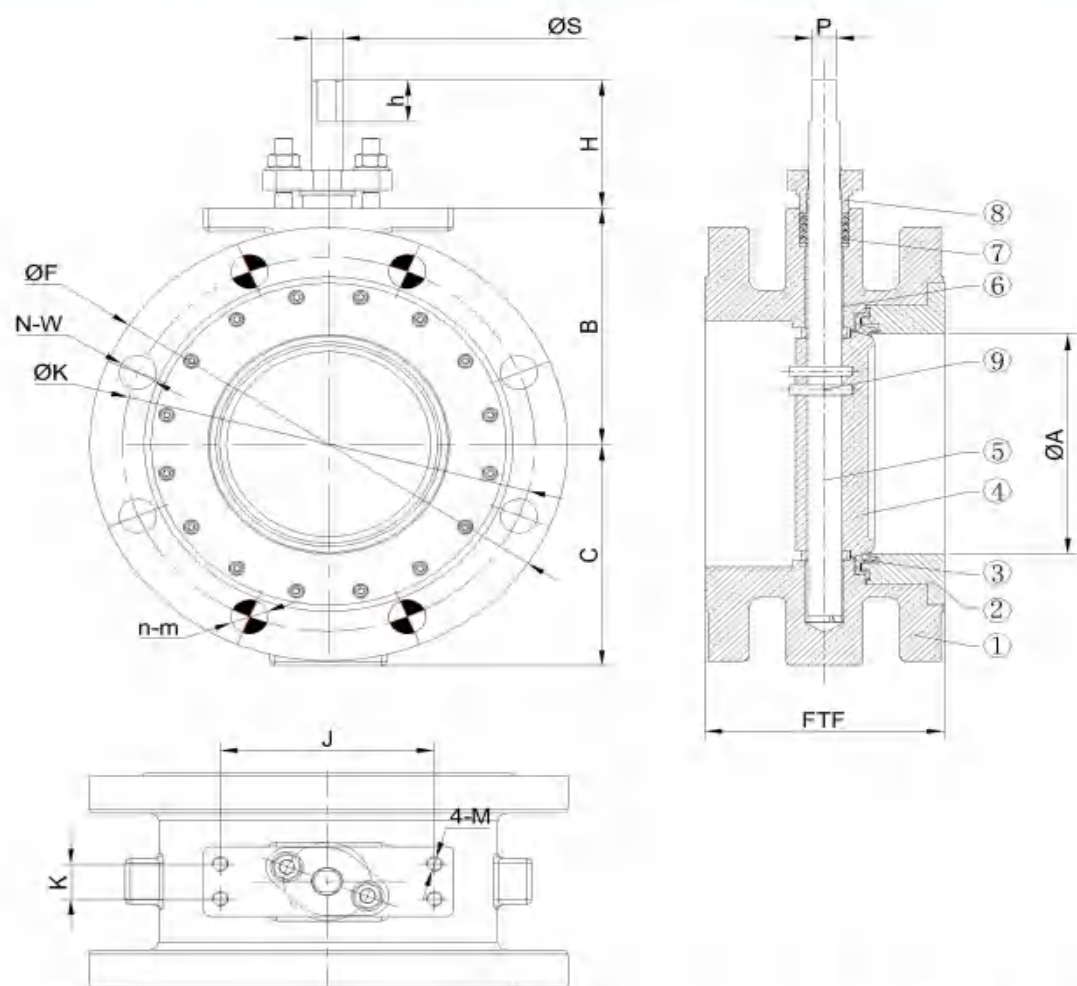


请在需要的材料配置方格里打钩，需要其他材料的请在空白列。
Place a tick in the appropriate box which material you required.
Other materials tick the "other" column and remark.

No	Partname	A	B	C	D	E	Other
9	Pin	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH	
8	Cover	WCB	WCB	CF8	CF8M	CF3M	
7	Packing	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE	
6	Sleeve	316L+RPTFE					
5	Stem	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH	
4	Disc	CF8	CF8M	CF8	CF8M	CF3M	
3	Seat	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE	
2	Insert	A105	A105	F304	F316	F316L	
1	Body	WCB	WCB	CF8	CF8M	CF3M	

Data	Technology standard
Pressure	PN16
Design & manufacturing standards	API609
Type	Double Flange
Temperature & pressure standards	ASME B16.34
Temperature	-30℃~180℃
Inspection & test	API598
Leakage	VI FC170-2
Flange size	GB/T9113

150磅级双法兰式蝶阀尺寸 Class 150 Double Flange Type Butterfly Valve Dimension

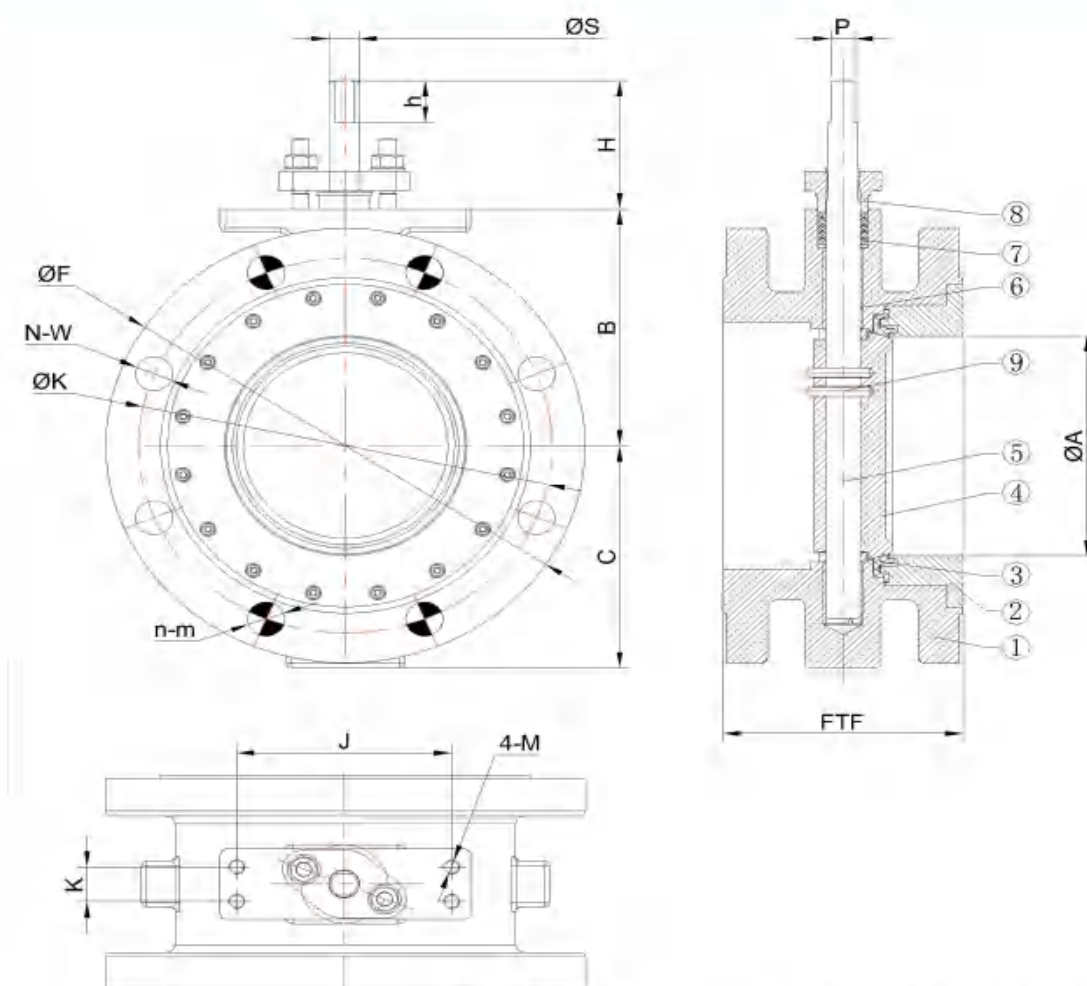

请在需要的材料配置方格里打钩，需要其他材料的请在空白列。
Place a tick in the appropriate box which material you required.
Other materials tick the "other" column and remark.

No	Partname	A	B	C	D	E	Other
9	Pin	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH	
8	Cover	WCB	WCB	CF8	CF8M	CF3M	
7	Packing	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE	
6	Sleeve	316L+RPTFE					
5	Stem	17-4PH	17-4PH	17-4PH	17-4PH	17-4PH	
4	Disc	CF8	CF8M	CF8	CF8M	CF3M	
3	Seat	RPTFE	RPTFE	RPTFE	RPTFE	RPTFE	
2	Insert	A105	A105	F304	F316	F316L	
1	Body	WCB	WCB	CF8	CF8M	CF3M	

Data	Technology standard
Pressure	Class 150
Design & manufacturing standards	API609
Type	Double Flange
Temperature & pressure standards	ASME B16.34
Temperature	-30℃~180℃
Inspection & test	API598
Leakage	VI FC170-2
Flange size	ASME B16.5/MSS SP-44